


EXHAUST SILENCERS





Type REAB35-IS

Damping level 35 dB(A) with integrated Spark Arrestor

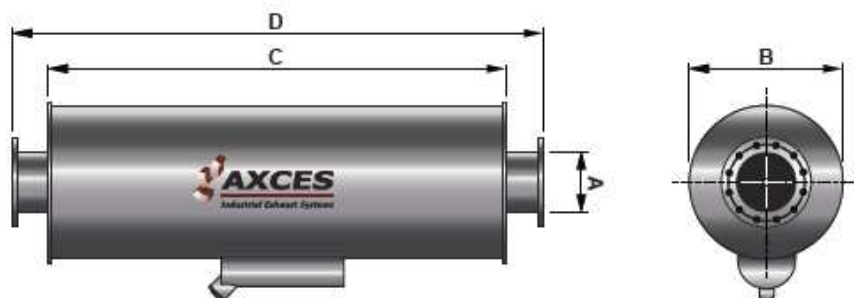

| Article. No | A (inch) | NB (mm) | Pipe (mm) | B (mm) | C (mm) | D (mm) | Weight (mass) |
|-------------|----------|---------|-----------|--------|--------|--------|---------------|
| 14120000015 | 1.5" | 40 | 48.3 | 200 | 750 | 900 | 10 kg |
| 14120000020 | 2" | 50 | 60.3 | 200 | 750 | 900 | 15 kg |
| 14120000025 | 2.5" | 60 | 76.1 | 260 | 850 | 1000 | 22 kg |
| 14120000030 | 3" | 80 | 88.9 | 310 | 850 | 1000 | 30 kg |
| 14120000040 | 4" | 100 | 114.3 | 360 | 1270 | 1500 | 50 kg |
| 14120000050 | 5" | 125 | 139.7 | 400 | 1270 | 1500 | 65 kg |
| 14120000060 | 6" | 150 | 168.3 | 475 | 1500 | 1750 | 125 kg |
| 14120000080 | 8" | 200 | 219.1 | 560 | 1750 | 2000 | 170 kg |
| 14120000100 | 10" | 250 | 273.0 | 635 | 2250 | 2500 | 250 kg |
| 14120000120 | 12" | 300 | 323.9 | 760 | 2500 | 2750 | 320 kg |
| 14120000140 | 14" | 350 | 355.6 | 800 | 2750 | 3000 | 410 kg |
| 14120000160 | 16" | 400 | 406.4 | 860 | 3000 | 3250 | 500 kg |
| 14120000180 | 18" | 450 | 457.2 | 910 | 3250 | 3500 | 565 kg |
| 14120000200 | 20" | 500 | 508.0 | 960 | 3500 | 3750 | 640 kg |

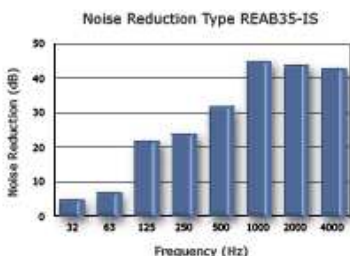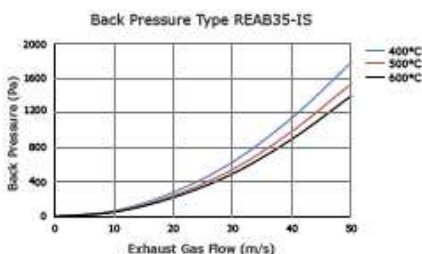

Damping Of The Noise Level +/- 35 dB(A)

Damping Basics of the silencers type REAB35-IS are according the reflection-absorption principal

Spark Arrestor The silencers type REAB35-IS are including an integrated Spark Arrestor

Mounting The silencers type REAB35-IS can be installed both horizontal and vertical

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s

Material Silencers type REAB35-IS are produced out of Steel 37-2 (S235JRG2)

Temperature Maximum allowable temperature is 600 °C

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements

Isolation
Technologie Services

ITS
acoustique

Agent Commercial
Commercial Agent
France

Tél. +33(0) 952 36 35 31
contact@its-acoustique.fr
www.its-acoustique.fr