

# EXHAUST SILENCERS





## Type REAB35

Damping level 35 dB(A) without integrated Spark Arrestor



Article. No	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (mass)
140200000015	1.5"	40	48.3	200	750	900	10 kg
140200000020	2"	50	60.3	200	750	900	15 kg
140200000025	2.5"	60	76.1	260	850	1000	22 kg
140200000030	3"	80	88.9	310	850	1000	30 kg
140200000040	4"	100	114.3	360	1270	1500	50 kg
140200000050	5"	125	139.7	400	1270	1500	65 kg
140200000060	6"	150	168.3	475	1500	1750	125 kg
140200000080	8"	200	219.1	560	1750	2000	170 kg
140200000100	10"	250	273.0	635	2250	2500	250 kg
140200000120	12"	300	323.9	760	2500	2750	320 kg
140200000140	14"	350	355.6	800	2750	3000	410 kg
140200000160	16"	400	406.4	860	3000	3250	500 kg
140200000180	18"	450	457.2	910	3250	3500	565 kg
140200000200	20"	500	508.0	960	3500	3750	640 kg

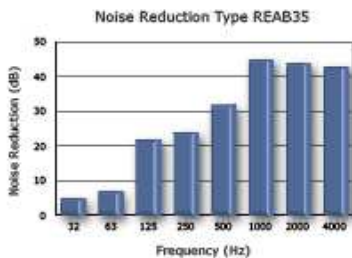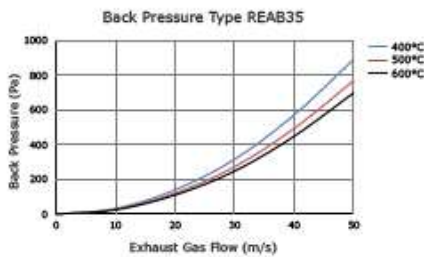

### Damping Of The Noise Level +/- 35 dB(A)

**Damping Basics** of the silencers type REAB35 are according the reflection-absorption principal

**Spark Arrestor** The silencers type REAB35 are excluding an integrated Spark Arrestor

**Mounting** The silencers type REAB35 can be installed both horizontal and vertical

**Exhaust Gas Speed** Advised Exhaust Gas Speed between 20-50 m/s

**Material** Silencers type REAB35 are produced out of Steel 37-2 (S235JRG2)

**Temperature** Maximum allowable temperature is 600 °C

**Custom Made** Axces silencers are also manufactured based on specific dimensions or client's requirements

Isolation  
Technologie Services

**ITS**  
acoustique

Agent Commercial  
Commercial Agent  
France

Tél. +33(0) 952 36 35 31  
contact@its-acoustique.fr  
www.its-acoustique.fr