


EXHAUST SILENCERS





Type REAB40-IS

Damping level 40 dB(A) with integrated Spark Arrestor

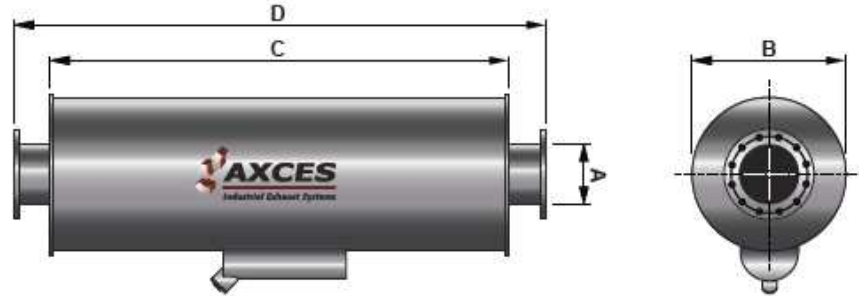

Article. No	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (mass)
14130000020	2"	50	60.3	250	750	900	25 kg
14130000025	2.5"	60	76.1	300	750	900	35 kg
14130000030	3"	80	88.9	300	1000	1250	40 kg
14130000040	4"	100	114.3	400	1250	1500	80 kg
14130000050	5"	125	139.7	400	1500	1750	90 kg
14130000060	6"	150	168.3	480	1500	1750	130 kg
14130000080	8"	200	219.1	600	1750	2000	200 kg
14130000100	10"	250	273.0	700	2250	2500	300 kg
14130000120	12"	300	323.9	800	2500	2750	400 kg
14130000140	14"	350	355.6	950	3000	3250	625 kg
14130000160	16"	400	406.4	950	3500	3750	800 kg
14130000180	18"	450	457.2	1100	4000	4250	1250 kg
14130000200	20"	500	508.0	1200	4500	4750	1500 kg

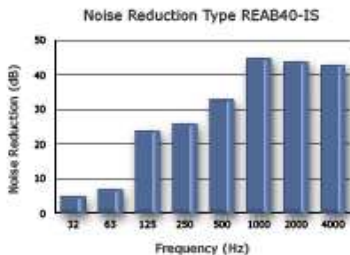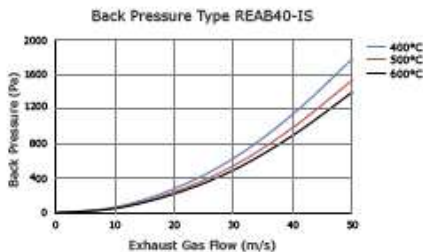

Damping Of The Noise Level +/- 40 dB(A)

Damping Basics of the silencers type REAB40-IS are according the reflection-absorption principal

Spark Arrestor The silencers type REAB40-IS are including an integrated Spark Arrestor

Mounting The silencers type REAB40-IS can be installed both horizontal and vertical

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s

Material Silencers type REAB40-IS are produced out of Steel 37-2 (S235JRG2)

Temperature Maximum allowable temperature is 600 °C

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements