


EXHAUST SILENCERS





Type REAB40

Damping level 40 dB(A) without integrated Spark Arrestor

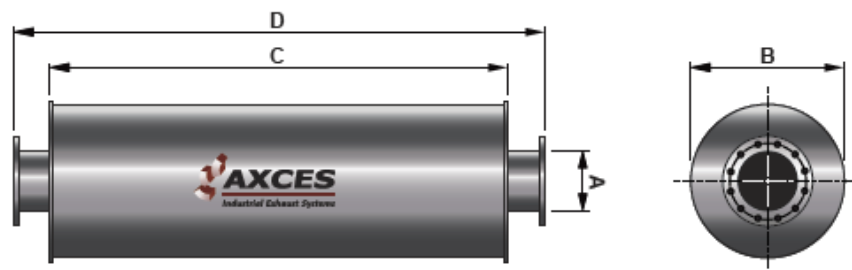

| Article. No | A (inch) | NB (mm) | Pipe (mm) | B (mm) | C (mm) | D (mm) | Weight (mass) |
|-------------|----------|---------|-----------|--------|--------|--------|---------------|
| 14030000020 | 2" | 50 | 60.3 | 250 | 750 | 900 | 25 kg |
| 14030000025 | 2.5" | 60 | 76.1 | 300 | 750 | 900 | 35 kg |
| 14030000030 | 3" | 80 | 88.9 | 300 | 1000 | 1250 | 40 kg |
| 14030000040 | 4" | 100 | 114.3 | 400 | 1250 | 1500 | 80 kg |
| 14030000050 | 5" | 125 | 139.7 | 400 | 1500 | 1750 | 90 kg |
| 14030000060 | 6" | 150 | 168.3 | 480 | 1500 | 1750 | 130 kg |
| 14030000080 | 8" | 200 | 219.1 | 600 | 1750 | 2000 | 200 kg |
| 14030000100 | 10" | 250 | 273.0 | 700 | 2250 | 2500 | 300 kg |
| 14030000120 | 12" | 300 | 323.9 | 800 | 2500 | 2750 | 400 kg |
| 14030000140 | 14" | 350 | 355.6 | 950 | 3000 | 3250 | 625 kg |
| 14030000160 | 16" | 400 | 406.4 | 950 | 3500 | 3750 | 800 kg |
| 14030000180 | 18" | 450 | 457.2 | 1100 | 4000 | 4250 | 1250 kg |
| 14030000200 | 20" | 500 | 508.0 | 1200 | 4500 | 4750 | 1500 kg |

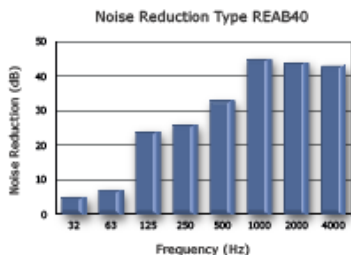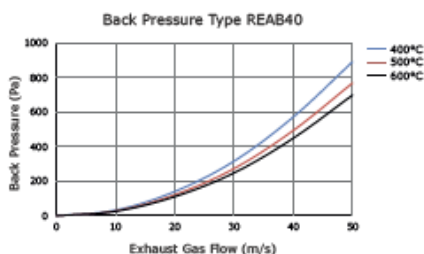

Damping Of The Noise Level +/- 40 dB(A)

Damping Basics of the silencers type REAB40 are according the reflection-absorption principal

Spark Arrestor The silencers type REAB40 are excluding an integrated Spark Arrestor

Mounting The silencers type REAB40 can be installed both horizontal and vertical

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s

Material Silencers type REAB40 are produced out of Steel 37-2 (S235JRG2)

Temperature Maximum allowable temperature is 600 °C

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements

Isolation
Technologie Services

ITS
acoustique

Agent Commercial
Commercial Agent
France

Tél. +33(0) 952 36 35 31
contact@its-acoustique.fr
www.its-acoustique.fr